




Cutit roata tip SYKES

Gear cutters SYKES type

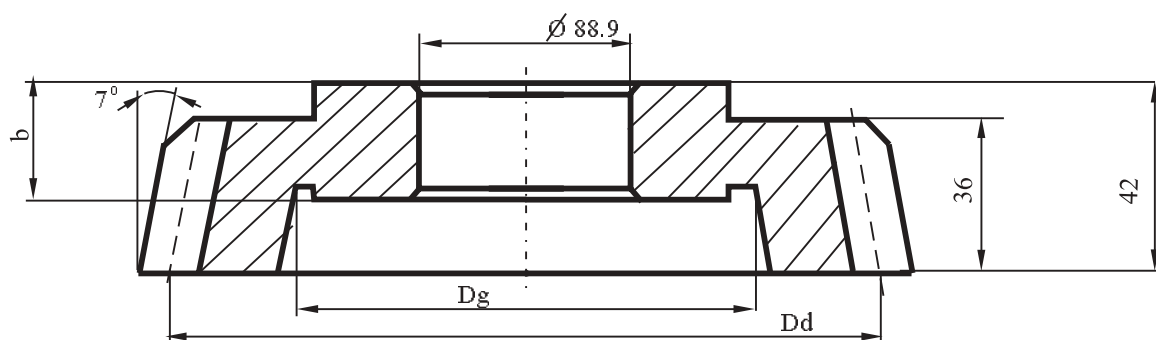

Modul m (mm)	Numar de dinti z	Diam. de divizare Dd (mm)	Unghi de inclinare la divizare $\beta_d (^\circ)$	Grosimea butucului b (mm)	Diametrul degajarii Dg (mm)	Pret ()
1	2	3	4	5	6	7
3	53	159	31°03'46"	20	124	
3.5	47	164.5	31°55'50"	20	124	
4	39	156	30°34'57"	20	124	
4.5	36	162	31°32'17"	20	124	
5	33	165	32° 0'31"	20	124	
5.5	29	159.5	31°08'32"	20	120	
6	27	162	31°32'17"	20	120	
6.5	25	162.5	31°37' 0"	21	120	
7	24	168	32°28'28"	21	120	
8	21	168	32°28'28"	21	120	
9	18	162	31°32'17"	21	111.5	
10	16	160	31°13'18"	21	111.5	
11	14	154	30°15'35"	21	105.5	
12	14	168	32°28'28"	21	111.5	

Cremaliera de referinta a rotii prelucrate :20^o-1-0.3 ;
Pasul elicei ghidajului masinii de danturat in "V" : 829.2741 ;

NOTA : Se livreaza in seturi de doua cutite (unul dreapta ,unul stanga).